


Straight connection joint



The Filoform range of cast resin Straight Joints are approved in accordance with DIN EN 50393 (VDE 0278:393):2006-11, and are suitable for use with both armoured and unarmoured cables up to and including 1kv. The joints are suitable for use on most cable types, including PILC, XLPE, PVC and EPR, and can be supplied complete with armour earth kit and mechanical connectors as standard.

The standard Straight Joints can be upgraded to suit 3.3kv by using a separate supplementary kit.

Designed for UK armoured cables to allow plenty of room to work.

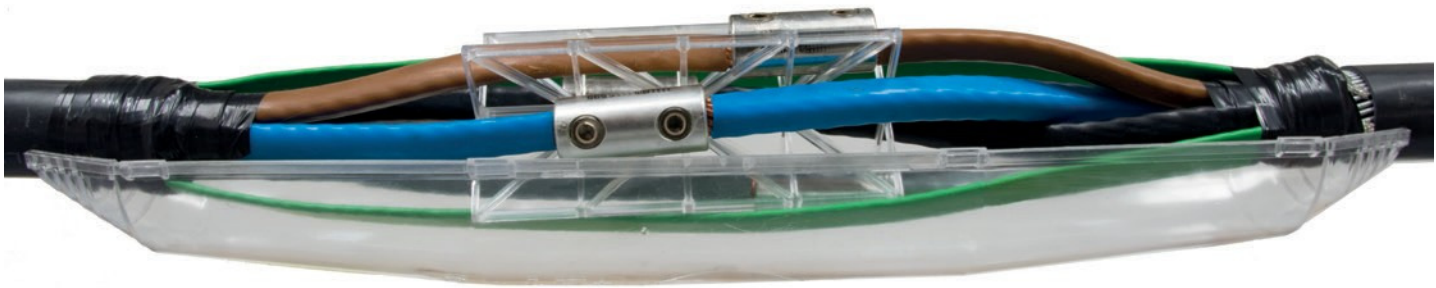

****Image shown 95mm 4 core SWA cross cored connection****

Item number	Description	Cable Diameter (mm)	Dimensions (mm)
CM0/ST6 PAD's No. 055/014007 ST6	Straight 6 (Injection Moulded)	Ø 5 - 20	L200 x Ø35
CM1/ST16 PAD's No. 055/014013 ST16	Straight 16 (Injection Moulded)	Ø 8 - 30	L250 x Ø45
CM2/ST25 PAD's No. 055/014012 ST25	Straight 25 (Injection Moulded)	Ø 10 - 34	L320 x Ø60
CM3/ST95 PAD's No 055/014006 ST95	Straight 95 (Injection Moulded)	Ø 30 - 48	L450 x Ø75
CM4/ST120 PAD's No. 055/014015 ST95/120	Straight 120 (Injection Moulded)	Ø 37 - 67	L547 x Ø108

- Type tested according to: EN 50393:2006-11
- Hydrolysis resistant polyurethane resin in a transparent 2 component bag
- Strong transparent shells
- Fully waterproof, no resin leakage
- Cable spacers included
- Complete kit, sealing tape, sandpaper, and protective gloves also included
- Quick and easy installation
- Connectors and earthing kits available on request
- Type tested according to: IEC 60455-3-8:2013

Features