




A CRH COMPANY

CE COLD SHRINK END CAPS

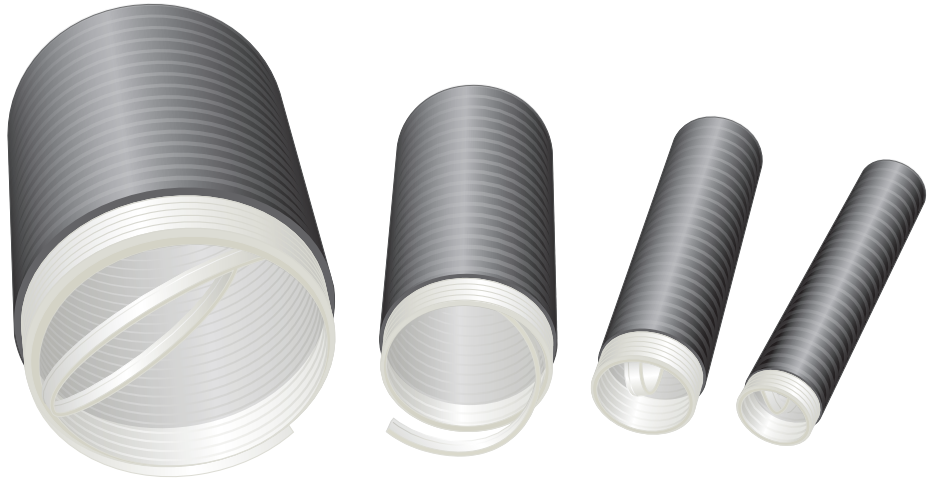

SELECTION TABLE

Product Number	Before Shrink Dia	After Shrink Dia	Wall Thickness	Cable Dia	Length
CE-1	Ø20	Ø12	2.5	Ø13 - Ø15	70
CE-2	Ø28	Ø16	2.5	Ø18 - Ø23	70
CE-3	Ø56	Ø23	2.6	Ø25 - Ø48	70
CE-4	Ø80	Ø46	2.6	Ø48 - Ø70	70

- Manufactured from EPDM rubber
- Meeting a variety of configuration requirements
- Providing sealing protection over multi-core cable ends
- Simple and fast installation, no tools required
- Exceptional moisture seal
- No mastic or tape required
- High resistance to fungus, acid, alkalis and ozone
- No training required for installation



Property	Unit	Typical Value	Standard of Test
Hardness	Shore A	43	ASTM D 2240
Tensile Strength	MPa	9	ASTM D 412
Elongation at Break	%	600	ASTM D 412
Tear Strength	KN/M	30	ASTM D 624
Volume Resistivity	Ω-cm	≥1x10 ¹⁴	IEC 60093

All dimensions in mm