

# WallMax® Group

## WMR Series

### WallMax® Multicolor Regular Modules

WallMax® Regular Modules are made of two rubber cradles with a central opening to accommodate the passage of cables and pipes.

Modules are designed to fit a large variety of cable sizes, as the inner structure of each half consists of separate layers, which can be easily peeled off to allow for maximum range of adaptability.

With a solid core, WallMax® Modules can be used to fill up frame space where cable passage is not needed, while at the same time constituting a spare part for future use.

Standard depth of each Regular Module is 60mm.

#### Key benefits:


- » Durable EPDM rubber construction with two black cradles.
- » Colour-coded layers (yellow, purple, red) for fast diameter identification and reduced install time.
- » Min/max diameters clearly printed on each side.
- » Solid core modules fill unused frame space and double as spares for future cabling.
- » Standard 60mm depth.
- » Combine single and multi-opening modules to optimise frame packing and space efficiency.

**Material:** EPDM Rubber



WallMax®  
Module Regular  
(WMR)

WallMax® Multicolor Regular Modules allow for quick, easy installation. Combining modules with single and multiple openings maximises the utilisation of packing space within a frame.

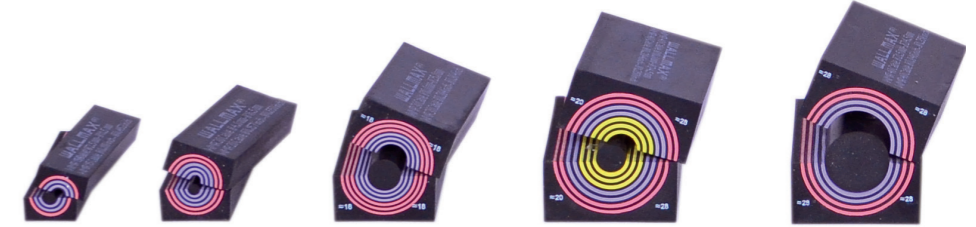

Code	Article	Accommodates cable/pipe diameter		External dimensions (mm)	Weight	
		ø mm	ø in		g	lb
716000 0015	WRM 15	0+2.5 - 11.6	0+0.098 - 0.457	15X15	16	0.035
716000 4015	WMR 15w40	0+2.5 - 11.6	0+0.098 - 0.457	15x40	42	0.093
716000 0020	WMR 20	0+4.0 - 16.5	0+0.157 - 0.650	20x20	28	0.062
716000 4020	WMR 20w40	0+4.0 - 16.5	0+0.157 - 0.650	20x40	54	0.119
71 6000 0030	WRM 30	0+10.0 - 25.0	0+0.394 - 0.984	30x30	63	0.139
71 6000 4030	WRM 30w40	0+10.0 - 25.0	0+0.394 - 0.984	30x40	84	0.185
71 6000 0040	WRM 40	0+21.5 - 34.5	0+0.846 - 1.358	40x40	113	0.256
71 6000 1040	WRM 40 10-34	0+10.0 - 34.5	0+0.394 - 1.358	40x40	112	0.247
71 6000 0060	WRM 60	0+24.0 - 54.0	0+0.945 - 2.126	60x60	254	0.560
716000 2860	WRM 60 28-54	0+28.0 - 54.0	0+1.102 - 2.126	60x60	254	0.560
716000 0080	WRM 80	0+48.0 - 71.0	0+1.890 - 2.795	80x80	452	0.996
716000 0090	WRM 90	0+48.0 - 71.0	0+1.890 - 2.795	90x90	572	1.261
716000 0120	WRM 120	0+67.5 - 99.0	0+2.657 - 3.898	120x120	1028	2.266

Note: weights are approx.